



FDV200/FV200

VENTED FREE STANDING GAS STOVE



The Ultimate in Design, Engineering & Quality

The unit illustrated is the FDV200PN Free Standing Direct Vent Gas Stove Pedestal Model, LOGC200 Cast Split Oak Log Set with glowing embers, FDV200RL Refractory Brick Liner, and F200ADDX Arch Door Deluxe.

The ultimate Free Standing Gas Stove for replacement of a wood stove or renovation

YOUR BEST CHOICE FOR INSTALLATION ANYWHERE THROUGHOUT YOUR HOME.

The FV200 B-Vented model (4" B-Vent) is particularly well suited for replacement of wood stoves as it can utilize the existing wood stove chimney. The unit has a spill safety switch, which will shut down the appliance in case of a blocked flue or downdraft occurs.

The FDV200 Direct Vent Model provides sealed combustion where it draws outside air for combustion. This model can be vented either horizontally or vertically.

MINIMUM CLEARANCES TO COMBUSTIBLES:

FDV200 FV200

6"	7 ¹ / ₂ "	from side of unit
3"	3"	from back of unit
3"	3"	from side of unit in corner

ALCOVE INSTALLATION:

30"	depth (max.)
56"	height (min.)
53"	width (min.)

	DIRECT VENT		B-VENT	
MODEL	FDV200N	FDV200LP	FV200N	FV200LP
	FDV200PN	FDV200PLP	FV200PN	FV200PLP
FUEL	NATURAL	PROPANE	NATURAL	PROPANE
INPUT LOW	20,000 BTU	21,000 BTU	20,000 BTU	25,000 BTU
INPUT HIGH	30,000 BTU	26,000 BTU	30,000 BTU	32,000 BTU
EFFICIENCY	77%	78%	73%	76%
FE (P.4.1-02)	60.3%	63.6%	68.3%	68.7%

FEATURES*


- Stoves are available as a Pedestal or Leg model
- Millivolt valve system allows operation during a power failure with Hi-Low heat and flame adjustment
- Dual burner system, with Realistic Flame Pattern
- Heat radiating ceramic glass
- Mobile home approved - (Direct Vent Model Only)
- Approved for installation in a bedroom or bed sitting room
- Cast Oak Log Set with glowing embers*





OPTIONAL FEATURES

- Heat activated blower with variable speed control
- Brick Refractory Liner (3 pieces)
- Remote Control on/off or Thermostat
- Millivolt Wall Mount Thermostat
- Programmable Millivolt Thermostat
- Arch Door Deluxe Overlay

DIMENSION AND SIZING

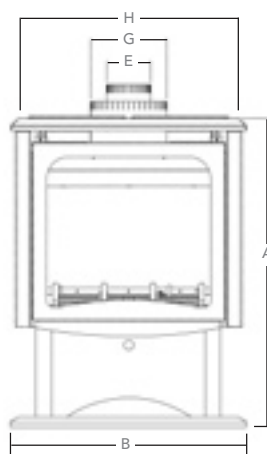

A	28 ¹ / ₂ "
B	21 ¹¹ / ₁₆ "
C	17 ¹ / ₂ "
D	15"
E	4" diameter
F	5 ¹ / ₈ "
G	7" diameter
H	21 ⁵ / ₈ "

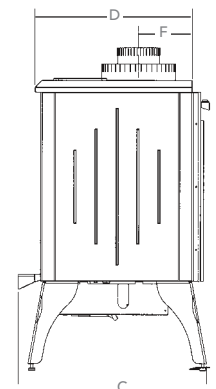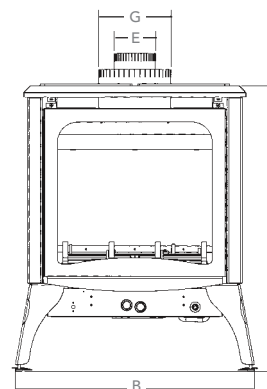

A	27 ¹ / ₈ "
B	23 ¹ / ₄ "
C	17 ¹ / ₂ "
D	15"
E	4" diameter
F	5 ¹ / ₈ "
G	7" diameter



With a direct vent appliance you can vent either through the side wall above the unit or straight up through the roof.

The model illustrated is the FDV200N Leg Model, with LOGC200 Log Set, and FDV200RL Brick Liner.



Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.
 Certification: The model FDV200 is certified for USA and Canada, Certified to: ANSI Z21.88a-2002/CSA-2.33-2002, Can/CGA 2.17-1991, CSA P.4.1-02. Listed Direct Vent Gas Fired Free Standing Room Heater. The model FV200 is certified to ANSI Z21.88b-2003/CSA 2.33b-2003, Can/CGA 2.17-1991
 *Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue
 Winnipeg, Manitoba, Canada R2R 2V3
 Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com