



# VFI25 / VFI30

VENTED GAS FIREPLACE INSERT



The Ultimate in Design, Engineering & Quality



This unit illustrated is a VFI30 Vented Fireplace Insert – Natural Gas, with V30S2640B Surround Deluxe – Black V30T2640P Trim Black, V2R2640 Riser for Deluxe Surround VI30GBL Grills – Black and LOGC6 Log Set – Five Piece Cast Split Oak with Glowing Ember Chunks, VI30RL Refractory Brick Liner.

# The Ultimate in Vented Fireplace Inserts, convert your wood burning fireplace to gas.

| MODEL              | VFI25             | VFI30             |
|--------------------|-------------------|-------------------|
| HI/LO FIRE CONTROL | YES               | YES               |
| INPUT MAX. (NG)    | 25,000-17,000 BTU | 30,000-17,500 BTU |
| INPUT MAX. (LP)    | 25,000-17,000 BTU | 30,000-24,000 BTU |
| EFFICIENCY         | 74%NG / 78%LP     | 78%NG / 81%LP     |
| VENTING            | 4"                | 4"                |
| FE (P.4.1-02)      | 45.8%NG / 45.8%LP | 50.6%NG / 50.6%LP |

## INSERT DIMENSIONS

|   | VFI25                            | VFI30                             |
|---|----------------------------------|-----------------------------------|
| A | 15 <sup>1</sup> / <sub>2</sub> " | 15 <sup>1</sup> / <sub>2</sub> "  |
| B | 14"                              | 14"                               |
| C | 20 <sup>1</sup> / <sub>2</sub> " | 20 <sup>1</sup> / <sub>2</sub> "  |
| D | 14"                              | 14"                               |
| E | 24 <sup>1</sup> / <sub>4</sub> " | 26 <sup>1</sup> / <sub>2</sub> "  |
| F | 26 <sup>1</sup> / <sub>4</sub> " | 28 <sup>5</sup> / <sub>8</sub> "  |
| G | 8 <sup>1</sup> / <sub>4</sub> "  | 8 <sup>1</sup> / <sub>4</sub> "   |
| H | 16 <sup>3</sup> / <sub>4</sub> " | 20 <sup>1</sup> / <sub>4</sub> "  |
| I | 19"                              | 22 <sup>7</sup> / <sub>16</sub> " |

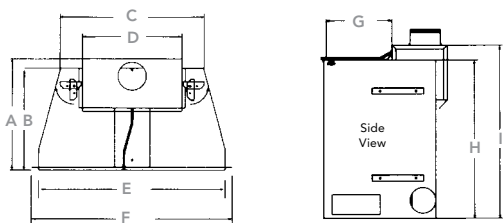

Surround (3 Piece)

## 3 PIECE SURROUND DIMENSIONS

| MODELS              | Height (O)                         | Width (P)                         | Part #    |
|---------------------|------------------------------------|-----------------------------------|-----------|
| <b>DELUXE</b>       |                                    |                                   |           |
| VFI25               | 24 <sup>13</sup> / <sub>16</sub> " | 36 <sup>3</sup> / <sub>16</sub> " | V25S2436B |
| VFI30               | 26 <sup>13</sup> / <sub>16</sub> " | 40 <sup>3</sup> / <sub>4</sub> "  | V30S2640B |
| <b>DELUXE LARGE</b> |                                    |                                   |           |
| VFI25               | 26 <sup>13</sup> / <sub>16</sub> " | 40 <sup>3</sup> / <sub>16</sub> " | V25S2640B |
| VFI30               | 28 <sup>13</sup> / <sub>16</sub> " | 44 <sup>3</sup> / <sub>4</sub> "  | V30S2844B |

## MINIMUM SIZE FOR INSTALLATION

| MODELS | Front Width | Rear Width                       | Height                           | Depth                            |
|--------|-------------|----------------------------------|----------------------------------|----------------------------------|
| VFI25  | 24"         | 20 <sup>1</sup> / <sub>2</sub> " | 17 <sup>1</sup> / <sub>2</sub> " | 16"                              |
| VFI30  | 29"         | 20 <sup>1</sup> / <sub>2</sub> " | 20 <sup>3</sup> / <sub>4</sub> " | 16 <sup>1</sup> / <sub>2</sub> " |

## FEATURES\*

- Millivolt valve system allows operation during a power failure with Hi/low heat and flame adjustment
- Blower with a thermostat controlled on/off including variable speed control is standard on all models
- Spill Safety Switch – in case of a blocked flue or downdraft, it will shut down the unit
- Dual burner system with glowing embers
- Bedroom and Bed Sitting Room approved

## OPTIONAL FEATURES\*

**Log Sets** – Choose from our LOGC6 five piece cast split oak log set with glowing ember chunks, or LOGC5 four piece cast split oak

**Grills** – Grills available in Black, or Classic Series Black with Polish Brass, Antique or Chrome Accents

**Surrounds Deluxe (3 piece)** – Black with Black trim

**Risers for Deluxe Surrounds** – Increases height coverage by 2<sup>1</sup>/<sub>2</sub>"

**Thermostat** – Wall Mount Millivolt, Thermostat, or Programmable Thermostat

**Remote Control** – On/Off, Thermostat or Hi/Lo On/Off

**Refractory Brick Liner** – VFI30 only



## CHOICE OF LOG SETS

### LOGC5 Split Cast Log Set

This unit illustrated is a VFI30 Vented Fireplace Insert – Natural Gas, with V30S2640B Surround Deluxe – Black V30T2640B Trim Black, V2R2640 Riser for Deluxe Surround V130GBL Grills – Black and LOGC5 Split Cast Log Set, V130RL Refractory Brick Liner.



Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certification: The models VFI25 and VFI30 are certified for Canada and USA. Listed Vented Gas Fired Room Heater to CAN1-21-M86, CAN/CGA 2.17-M91, ANSI Z21.11.1a-1993, CR89-001, CGAP.4-1-1996, ANSI Z21.50-1996/CGA 2.22-M96.

\*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue  
Winnipeg, Manitoba, Canada R2R 2V3  
Phone: (204) 632-1962 Fax: (204) 632-1960  
[www.kingsmanfireplaces.com](http://www.kingsmanfireplaces.com)